

#9008-DL

SUPER MUTT® PRO EDITION

Commercial Diagnostic Trailer Tester (7-Way Round Pin)

Quickly troubleshoot lighting, air brake and ABS systems with the industry's leading trailer tester. This intuitive, durable design is ideal for both on and off-site commercial trailer testing and repairs.



Features and Benefits

Electrical Testing (12 Volt Operation)

- Power lights: Manually, All-On, Auto Scan, or Remote Control
- Audible and visual alerts: cross, open, overloaded and short circuit indication
- Pulsar® mode allows diagnostic repair
- Advanced trailer wiring diagnostics
- Amperage readout and range (0-20 amps)
- Cable testing
- Ground failure detection: differentiates between wire and chassis ground

ABS Testing

- Access ABS blink codes
- Test ABS fault blink codes via Auxiliary and Brake Circuit activation (i.e., Meritor/Wabco, Bendix® TABS-6 and Haldex systems)

Air Brake Testing

- Performs leak down test on service and emergency lines
- Remote control allows observation of slackers to measure and adjust pushrods
- Real time, repetitive brake activation to find developing problems and verify leaking servo cans
- Features an internal air regulator

Remote Control

- Remote control included tests all trailer electric circuitry and air brake actuation, 200+ ft. range
- Sync multiple (12) remotes to one unit

#9008-DL (PRO Edition) Includes:


(2x) 12-Button Remote Controls, 8-ft. Gladhands, 5-ft. 7-Way Cable, 10-Amp Smart Battery Charger, Face/Battery Shield and Rain Cover

#9008-SE (Base Model) Includes:


12-Button Remote Control, 8-ft. Gladhands and 5-ft. 7-Way Cable

#9008-DLEXT Optional Set:

12-ft. Gladhands and 12-ft. 7-Way Cable

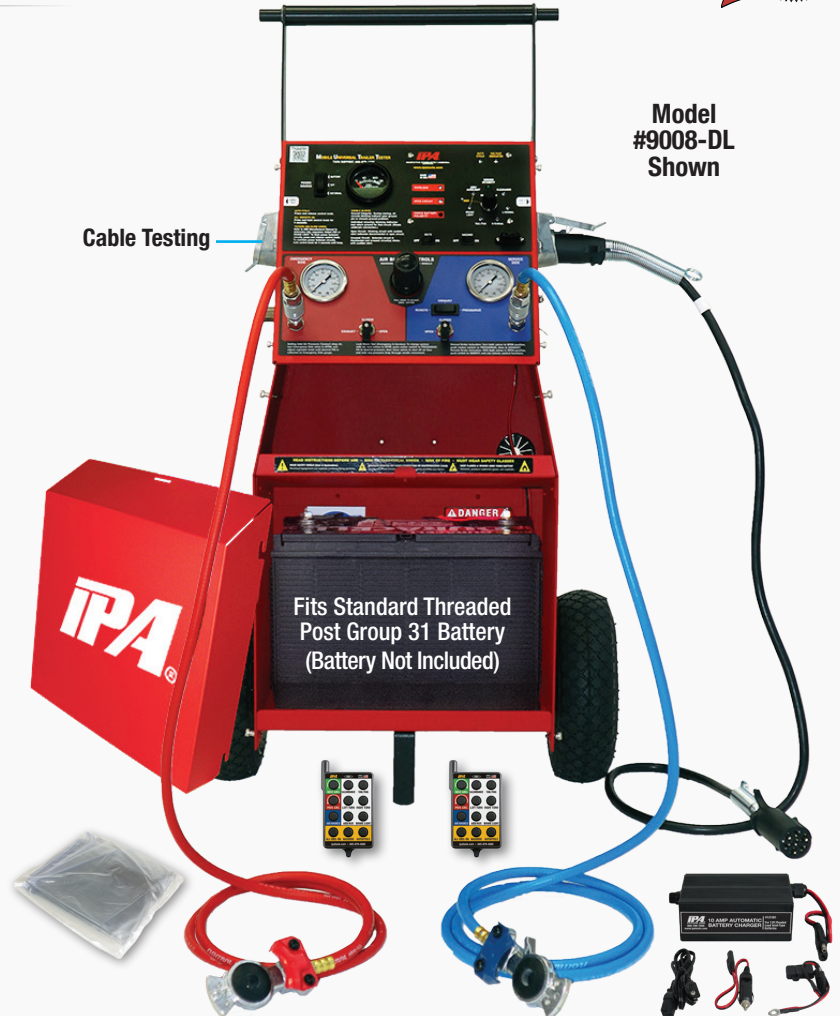

Model
#9008-DL
Shown

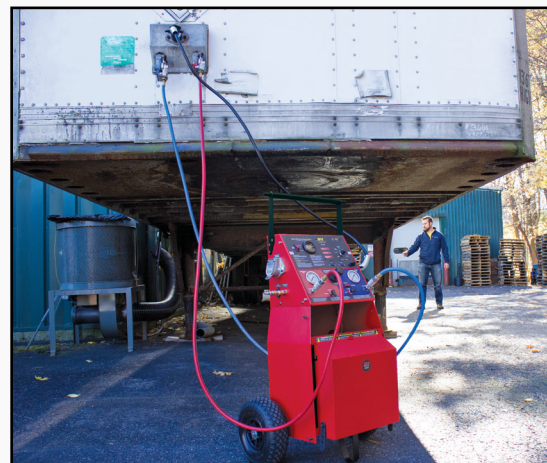

Complete Specifications

Specifications

- 7-Way Round Pin Connection Type
- 12/24V DC Power Input
- Suggested Battery
Group 31 or Similar (Not Included)
- 20A @ 12V DC Source Output
- 120 psi Max. Operating Pressure

Technology

- 2020 High-Speed Microprocessor
- 1mA Resolution

Mounted Equipment

- 16ga. Powder-Coated Steel Construction
- Steel 7-Way Sockets
- Panel-Mounted Regulator
- Integrated 1/4" NPT Stone Air Filter
- Milled Handle with Steel Brackets

Ports

- 12V Socket
- Two-Pin External Power Input Socket
- 30-Amp Fuse Holder w/ Fuse
- Chassis Ground

Accessories

- (2) 12-Button Remote Controls
433MHz Long Range
- 8-ft. Gladhands
- 5-ft. 7-Way Cable
- 10-Amp Smart Battery Charger
- Face/Battery Shield
- Rain Cover
- Manual



Overload/Open Circuit/Reversed Polarity Indicators

Circuit Selection

Internal Air Regulator

Weight and Dimensions

- 56 lbs.
- 21" W x 34" H x 15" D

Warranty

- 3-Year Limited
- Free Lifetime Technical Support and Video Conference

Country of Origin

- Made in the USA



(x2) 12-Button Remotes



8-ft. Gladhands



5-ft. 7-Way Cable



10-Amp Smart Battery Charger



Face/Battery Shield



Rain Cover